



500/15 4S



500/15 E
200/41 E



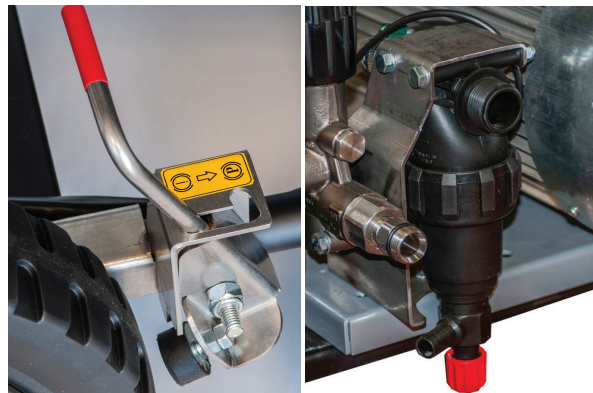
MAGNUM

IDROPULITRICI INDUSTRIALI AD ACQUA FREDDA, ALTA PORTATA/ALTA PRESSIONE
INDUSTRIAL COLD WATER PRESSURE CLEANERS HIGH PRESSURE/HIGH FLOW

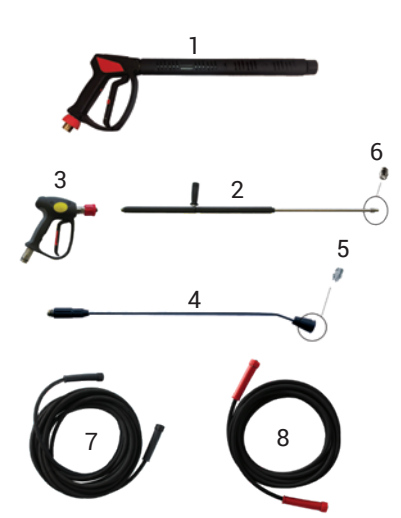


MAGNUM - IDROPULTRICI INDUSTRIALI AD ACQUA FREDDA, ALTA PORTATA/ALTA PRESSIONE

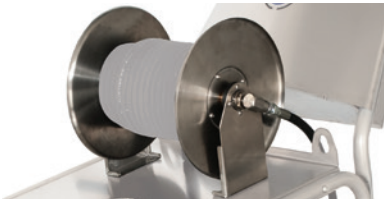
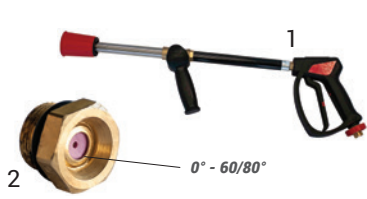
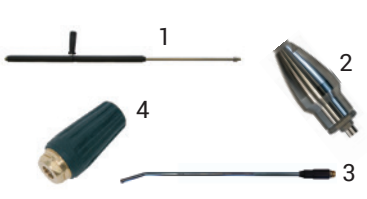
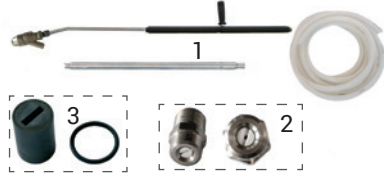
- Pompe a bielle con pistoni in ceramica e testata in ottone
- Motori 1450 rpm ad alto rendimento (versione E)
- Avviamento motore graduale (soft start) (versione E)
- Interruttore magnetotermico salvamotore (versione E)
- Total stop ritardato (versione E)
- Spina fissa IP54 su quadro elettrico 32A - 400V - IP54 (fornita senza cavo) (versione E)
- Circuito controllo/comando secondario in bassa tensione 24 V (versione E)
- Contaore
- Valvola di by-pass e regolazione con riarmo facilitato (pressione ridotta)
- Valvola di sicurezza (sovrapressione)
- Struttura tubolare verniciata a polveri e cofanatura in acciaio inox AISI 430
- Filtro acqua
- Ruote heavy duty (2x300 mm - 2x400 mm)
- 4 ganci di sollevamento
- Supporto portalanca di serie
- Freno di stazionamento a pedale
- Valvola termostatica di sicurezza
- Lancia con doppia impugnatura (mod. 500 Bar / 7100 psi)
- Ugello in acciaio inox con inserto in ceramica (mod. 500 Bar / 7100 psi)
- Triplex plunger pump with three ceramic pistons and brass head
- 1450 rpm motor (E version)
- Three phase motor soft starter (E version)
- Motor protective circuit breaker (E version)
- Delayed total stop (E version)
- Panel mount appliance inlet 32 Amp - 400V - IP54 (supplied without cable) (E version)
- Secondary control circuit 24 Volt low voltage
- Hours counter (E version)
- By Pass Valve with reduced pressure start
- Safety relief valve
- Powder coated metal frame with AISI 430 cover
- Inlet water filter
- Heavy duty wheels (2x300 mm - 2x400 mm)
- 4 lifting hooks on models
- Lance holder
- Parking brake pedal
- Thermal relief safety valve
- Lance with swivel side grip holder
- Stainless steel nozzle with ceramic tip (mod. 500 Bar / 7100 psi)



ACCESSORI IN DOTAZIONE / SUPPLIED ACCESSORIES

	N°	MOD.	COD.	DESCRIZIONE - DESCRIPTION
	1	200/41	01AC422	Idropistola con Semilancia e swivel (in M22 out M22) Spray gun with Semilance and swivel (in M22 out M22)
	2	500/15	01AC504	Lancia L1200 inox M24x1,5 - 1/4" F Lance L1200 M24x1,5 - 1/4" F - inox
	3	500/15	01AC507	Impugnatura M24-M24 Spry gun M24-M24
	4	200/41	01AC419	Lancia INOX l=70 cm in M22 out 1/4"F Stainless steel lance l=70 cm in M22 out 1/4"F
	5	200/41	I50278	Ugello 1/4" 25125 Nozzle 1/4" 25125
	6	500/15 E	I50440	Ugello 1/4" 15025 con inserto in ceramica Nozzle 1/4" 15025 with ceramic tip
		500/15 4S	I50441	Ugello 1/4" 1503 con inserto in ceramica Nozzle 1/4" 1503 with ceramic tip
	7	200/41 E	01AC502	Tubo A.P. - H.P. Hose 3/8" l=15 m R2 - 5/16" M22 - M22
	8	500/15 E 500/15 4S	01AC500	Tubo A.P. - H.P. Hose 3/8" (500 BAR) l=15 m M24 - M24

ACCESSORI A RICHIESTA/ ACCESSORIES ON DEMAND

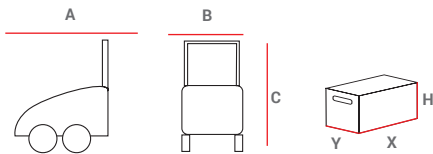
AVVOLGITUBO INOX 40m STAINLESS STEEL HOSE REEL 40m	LANCIA GETTO VARIABILE (DIRITTO/CONICO) VARIABLE SPRAY LANCE (STRAIGHT/CONE JET)	KIT UGELLO ROTANTE TURBO TURBO NOZZLE KIT
		
Mod. 500/15 E (M24 senza supporto - without support) Cod. 01AC513	Mod. 200/41 Lancia - Lance Cod. 01AC505	Mod. 500 bar Lancia/Lance M24x1,5 - 1/4" F 1 Cod. 01AC504
Mod. 500/15 4S (500 bar - M24 con supporto - with support) Cod. 01AC515		Mod. 500/15 Ugello - Nozzle (025) 2 Cod. 01AC326
Mod. 200/41 E (M22 senza supporto - without support) Cod. 01AC585	Mod. 200/41 Ugello - Nozzle (1,5) Cod. I50337	Mod. 500/15 Ugello - Nozzle (03) 2 Cod. 01AC327
Mod. 200/41 4S (M22 con supporto - with support) Cod. 01AC586		Mod. 200 bar Lancia/Lance (70 cm) 3 Cod. 01AC514
Mod. 200/41 Ugello - Nozzle (120) 4 Cod. 01AC331		
KIT SABBIAIATURA SANDBLASTING KIT (500 BAR - 7100 PSI)	SABBIA (25 KG) SAND (25 KG)	BATTERIE BATTERIES
		
Mod. 500 bar Kit sabbaiatura - Sandblasting kit Cod. 01AC527	Mod. Tutti/All Sabbia - Sand (25 kg) Cod. 01AC284	Mod. 500/15 4S Batteria / Battery (12V - 50 Ah) mm 210x180x190 Cod. 121AC132
Mod. 500 bar Ugello in ceramica - Ceramic tip nozzle 15025 1/4" Cod. I50440		
Mod. 500 bar Kit ricambio ugello sabbia - Nozzle sand 15025 1/4" Cod. 01AC562		

MAGNUM - IDROPULTRICI INDUSTRIALI AD ACQUA FREDDA, ALTA PORTATA/ALTA PRESSIONE
INDUSTRIAL COLD WATER PRESSURE CLEANERS HIGH PRESSURE/HIGH FLOW

KIT RUOTE PIVOTTANTI
SWIVEL CASTORS KIT



Mod. Tutti/All
Cod. B.KTSP00024



PESI E DIMENSIONI MACCHINA WEIGHTS AND DIMENSIONS MACHINE					IMBALLO PACKAGING			
MOD	A	B	C	Netto/Net	X	Y	H	Lordo/Gross
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
MAGNUM 500/15 E	1.000	800	1.020	180	1.200	800	1.210	201
MAGNUM 200/41 E	1.000	800	1.020	170	1.200	800	1.210	191
MAGNUM 200/41 4S	1.000	800	1.020	175	1.200	800	1.210	196
MAGNUM 500/15 4S	1.000	800	1.020	175	1.200	800	1.210	196

		500/15 E	200/41 E	200/41 4S	500/15 4S
codice - code		● 01MG01	● 01MG02	● 01MG10	● 01MG05
pressione mas. max. pressure	[bar] [Mpa - psi]	500 50-7250	200 20-2900	200 20-2900	500 50-7250
portata mas. max. flow rate	[lt/h]	900	2.460	2.460	900
pompa - pump		IP 66 HP	IP 66	IP 66	IP 66 HP
motore - motor	type	elettrico	elettrico	HONDA	HONDA
	mod.	electric	electric	GX690	GX690
	hp max	-	-	22	22
	hp net	-	-	17	17
avviamento motore engine start		soft start	soft start	elettrico/electric(*)	elettrico/electric(*)
potenza assorbita max max. absorbed power	[Kw]	18	18	18	-
sistema di arresto stop system		TSD	TSD	TSD	deceleratore aut. / aut. speed reducer
rotazione pompa pump speed	rpm	1.450	1.450	1.450	1.450
alimentazione supply voltage	[V-ph-Hz]	400-3-50	400-3-50	gasoline	gasoline
capacità serbatoio carburante fuel tank capacity	[lt]	-	-	7	7
massima temp. aliment. - max. inlet temp.	[°C]	40	40	40	40

(*) Batteria NON inclusa - Battery NOT included