



BIEMMEDUE


heating, cleaning and drying



TUTTI - ALL

MODELLI / MODELS
MODULA

MODELLI / MODELS
MODULA HD

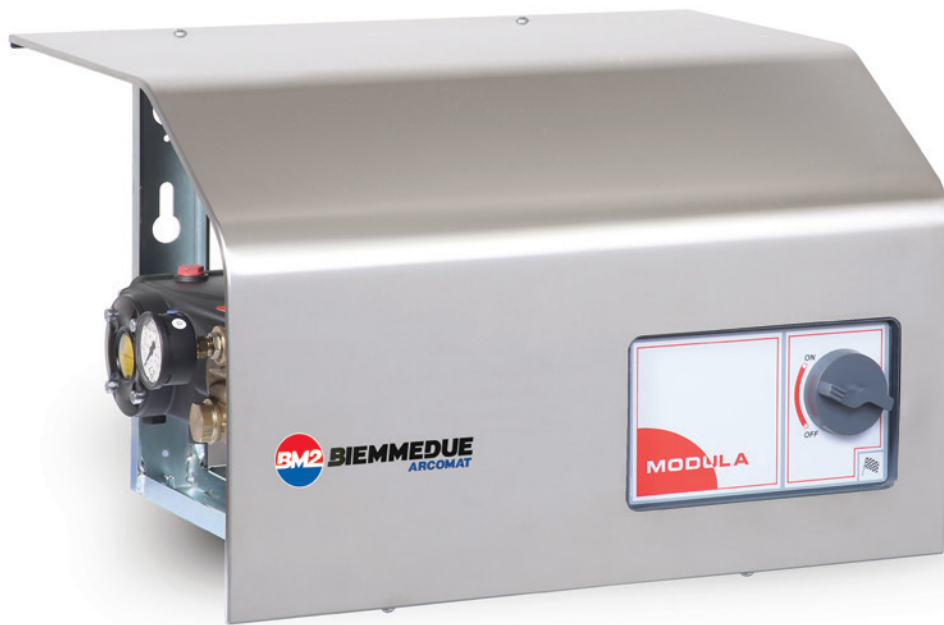




MODULA

IDROPULTRICI STAZIONARIE PROFESSIONALI AD ACQUA FREDDA
PROFESSIONAL STATIONARY COLD WATER HIGH PRESSURE CLEANERS



MODULA - IDROPULITRICI STAZIONARIE PROFESSIONALI AD ACQUA FREDDA

- Pompe a bielle con pistoni in ceramica e testata in ottone
- Motore 1450 rpm
- Motore ad alto rendimento
- Protezione termica motore
- Sistema di protezione dell'accoppiamento alberi motore-pompa (SJ)
- Total stop ritardato (TSD) per i modelli Modula
- Controllo macchina ACDS per modelli HD
- Controllo perdite per modelli HD
- Spegnimento automatico per mancanza d'uso dopo 20 min per modelli HD
- LED segnalazione «macchina pronta» e «anomalia» per modelli HD
- Memorizzazione del tempo di utilizzo della macchina con segnalazione led al raggiungimento del periodo di manutenzione programmata per modelli HD
- Copertura metallica in acciaio AISI 430
- Giunto girevole (swivel) per modelli HD
- Manometro
- Filtro acqua ispezionabile
- Tubo alta pressione da m 10 per modelli Modula e 15 m per modelli Modula HD
- Predisposizione per avvolgitubo (optional)
- Predisposizione per vaschetta acqua alimentazione (optional)
- Triplex plunger pump with three brass head
- 1450 rpm motor
- High efficiency motor
- Motor thermal protection
- Motor/pump coupling protection with special lubricant retention system (SJ)
- Delayed total stop (TSD) on Modula
- (ACDS) Advanced Control Delayed Stop on models HD
- Micro leakage control on models HD
- Automatic shutdown if idle for more than 20 min on models HD
- Warning LED "machine ready" and "malfunction" on models HD
- Hour counter device with service alert warning led on models HD
- Metal frame with AISI 430 cover
- High pressure Swivel Gun on models HD
- Pressure gauge
- Easy to inspect water filter
- 10 m high pressure hose on models Modula and 15 m on models Modula HD
- Hose reel (optional)
- Predisposed for optional water tank with floating-valve

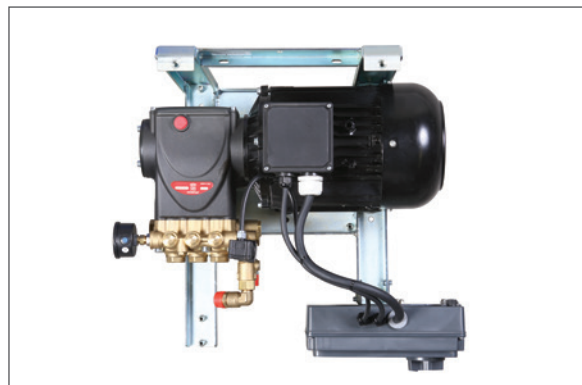







ACCESSORI IN DOTAZIONE / SUPPLIED ACCESSORIES

	N°	MOD.	COD.	DESCRIZIONE - DESCRIPTION
	1	MODULA HD 160-180-200	01AC422	Idropistola con Semilancia e swivel (in M22 out M22) Spray gun with Semilancia and swivel (in M22 out M22)
	2	MODULA 130-150-200	01AC418	Idropistola con Semilancia (in M22 out M22) Spray gun with Semilancia (in M22 out M22)
	3	Tutti - All	01AC319	Lancia - Lance l=50 cm (in M22 out 1/4" F)
	4	130/10	I50276	Ugello - Nozzle 1/4" M 25035
		200/15	I50284	Ugello - Nozzle 1/4" M 25045
		160/15 - 180/15	I50216	Ugello - Nozzle 1/4" M 2505
		180/18	I50307	Ugello - Nozzle 1/4" M 2506
	5	MODULA 130-150	01AC401	Tubo A.P. l=10 m R1 - 5/16" M22 - M22 H.P. hose l=10 m R1 - 5/16" M22 - M22
		MODULA 200/15	01AC398	Tubo A.P. l=10 m R2 - 5/16" M22 - M22 H.P. hose l=10 m R2 - 5/16" M22 - M22
		MODULA HD 160 180/18	01AC381	Tubo A.P. l=15 m R1 - 5/16" M22 - M22 H.P. hose l=15 m R1 - 5/16" M22 - M22
		MODULA HD 200/15	01AC425	Tubo A.P. l=15 m R2 - 5/16" M22 - M22 H.P. hose l=15 m R2 - 5/16" M22 - M22
	6	Tutti - All		Chiave - Key


ACCESSORI A RICHIESTA/ ACCESSORIES ON DEMAND

AVVOLGITUBO HOSE REEL	KIT UGELLO ROTANTE TURBO TURBO NOZZLE KIT	CONTROLLO REMOTO REMOTE CONTROL
<p>Mod. Tutti-All Cod. 01AC443</p>	<p>Mod. Tutti-All Lancia-Lance (70 cm) Cod. 01AC514</p>	<p>Mod. Modula HD kit controllo remoto con 15 m di cavo Remote control kit with 15 m power cord Cod. 01AC441</p>
	<p>Mod. 160/15 Ugello-Nozzle (05) Cod. 01AC296</p>	
	<p>Mod. 130/10 Ugello-Nozzle (035) Cod. 01AC293</p>	
	<p>Mod. 150/15 - 200/15 Ugello-Nozzle (045) Cod. 01AC295</p>	
	<p>Mod. 180/18 Ugello-Nozzle (06) Cod. 01AC348</p>	

MODULA - IDROPULTRICI STAZIONARIE PROFESSIONALI AD ACQUA FREDDA PROFESSIONALE STATIONARY COLD WATER HIGH PRESSURE CLEANERS

KIT GUARNIZIONI POMPA PER ALTA TEMPERATURA PUMP SEALS FOR HIGH TEMPERATURE	PIEDINI ANTIVIBRANTI RUBBER FEET	SUPPORTI SUPPORTS
		
Mod. Modula HD 15 e 20 lt Cod. B.PMVR00193	Piedini antivibranti per installazione a terra o su ripiano <i>Rubber feet for shelf or floor installation</i> Cod. KTSP00013	Mod. Modula HD supporto inox - <i>stainless-steel support</i> Cod. 01AC446 1
Mod. Modula HD 18 lt Cod. B.PMVR00194		Mod. Modula HD ripiano inox - <i>stainless-steel shelf</i> Cod. B.CRDS00815 2
		Mod. Tutti - <i>All</i> piastra aggancio rapido - <i>bracket for quick mounting</i> Cod. B.CRDS00814 3
UNITA' RISCALDANTE HEATING UNIT	SUPPORTO INOX STAINLESS STEEL RACK	
		 MAX 3 PZ 3 PCS MAX
Vedi pag 81 - <i>See page 81</i>	Mod. Tutti - <i>All</i> Cod. 01AC510	

PESI E DIMENSIONI MACCHINA WEIGHTS AND DIMENSIONS MACHINE				IMBALLO PACKAGING				
MOD	A	B	C	Netto/Net	X	Y	H	Lordo/Gross
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
MODULA 130/10	560	460	360	43	600	520	400	45
MODULA 150/15	560	460	360	47	600	520	400	49
MODULA 200/15	560	460	360	50	600	520	400	52
MODULA HD 160/15	560	460	360	55	600	520	400	57
MODULA HD 180/18	560	460	360	65	600	520	400	67
MODULA HD 200/15	560	460	360	65	600	520	400	67

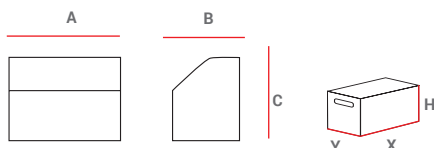

		130/10	150/15	200/15	160/15 HD	180/18 HD	200/15 HD
codice - <i>code</i>		● 01PF73	● 01PF74	● 01PF75	● 01PF76	● 01PF77	● 01PF78
pressione mas. - <i>pressure max.</i>	[bar] [MPa - psi]	130 13-1.880	150 15-2.180	200 20-2.900	160 16-2.300	180 18-2.600	200 20-2.900
portata mas. - <i>flow rate max.</i>	[lt/h]	600	900	900	900	1.080	900
pompa - <i>pump</i>		IP E1	IP E1	IP E1	IP 47	IP 47	IP 47
sistema di arresto - <i>stop system</i>		TSD	TSD	TSD	ACDS	ACDS	ACDS
rotazione pompa - <i>speed pump</i>	[rpm]	1.450	1.450	1.450	1.450	1.450	1.450
potenza assorbita max - <i>max. absorbed power</i>	[Kw]	3	4,7	6,5	5	7,2	7,2
alimentazione - <i>supply voltage</i>	[V - ph - Hz]	230-1-50	400-3-50	400-3-50	400-3-50	400-3-50	400-3-50
massima temp. aliment. - <i>max. inlet temp.</i>	[°C]	40	40	40	40	40	40