



# BIEMMEDUE

heating, cleaning and drying



TUTTI - ALL

XT FOOD



160/15  
180/18  
200/15  
200/21






## MODULA PLUS - XT FOOD

IDROPULTRICI STAZIONARIE PROFESSIONALI AD ACQUA FREDDA  
PROFESSIONAL STATIONARY COLD WATER HIGH PRESSURE CLEANERS



## MODULA PLUS - IDROPULTRICI STAZIONARIE PROFESSIONALI AD ACQUA FREDDA

- Struttura chiusa e realizzata in acciaio inox AISI 304
  - Pompe a bielle con pistoni in ceramica, testata in ottone e guarnizioni per alta temperatura (mod. MODULA PLUS) - pompa per alta temperatura serie HT - 85°C (mod. XT FOOD)
  - Motore 1450 rpm
  - Protezione termica del motore
  - Motore ad alto rendimento
  - Trasmissione con giunto flessibile (FJ)
  - Controllo macchina ACDS
  - Controllo perdite
  - Spegnimento automatico per mancanza d'uso dopo 20 min
  - Led segnalazione «macchina pronta» e «anomalia»
  - Memorizzazione del tempo di utilizzo della macchina con segnalazione led al raggiungimento del periodo di manutenzione programmata
  - Idropistola con giunto girevole in alta pressione (swivel) e prolunga atermica
  - Manometro
  - Filtro acqua ispezionabile
  - Tubo alta pressione da m 15 antimacchia
  - Predisposizione per staffa aggancio rapido a muro (optional)
  - Predisposizione per controllo remoto (optional)
  - Predisposizione per avvolgitubo (optional)
- *Enclosed frame constructed in stainless steel AISI 304*
  - *Triplex plunger pump with three brass head and high temperature seals (mod. MODULA PLUS) - high temperature pump HT series - 85°C (mod. XT FOOD)*
  - *1450 rpm motor*
  - *High efficiency motor*
  - *Motor thermal protection*
  - *Motor/pump equipped with flexible joint (FJ)*
  - *(ACDS) Advanced Control Delayed Stop*
  - *High pressure swivel gun with heat proof extension*
  - *Micro leakage control*
  - *Automatic shutdown if idle for more than 20 min*
  - *Warning led "machine ready" and "malfunction"*
  - *Hour counter device with service alert warning led*
  - *Pressure gauge*
  - *Easy to inspect water filter*
  - *15 m non-marking high pressure hose*
  - *Predisposed for optional quick hook-up wall bracket*
  - *Predisposed for optional with remote control*
  - *Hose reel (optional)*

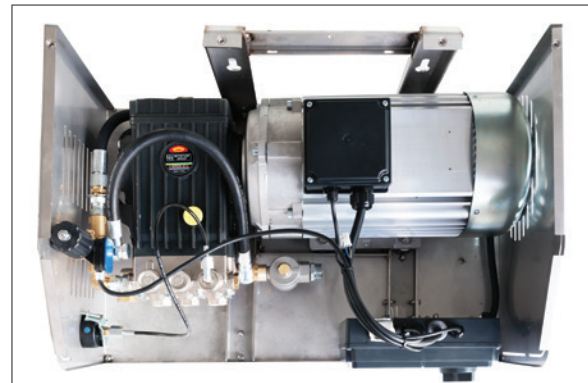




## ACCESSORI IN DOTAZIONE / SUPPLIED ACCESSORIES

		N°	MOD.	COD.	DESCRIZIONE - DESCRIPTION	
	1	Tutti-All		01AC422	Idropistola con Semilancia e swivel (in M22 out M22) Spray gun with Semilance and swivel (in M22 out M22)	
	2	Tutti-All		01AC419	Lancia INOX l=70 cm (in M22 out 1/4"F) Stainless steel lance l=70 cm (in M22 out 1/4"F)	
	3	130/10			I50276	Ugello - Nozzle 1/4"M 25035
		200/15			I50284	Ugello - Nozzle 1/4"M 25045
		160/15			I50216	Ugello - Nozzle 1/4"M 2505
		180/18			I50307	Ugello - Nozzle 1/4"M 2506
		160/30			I50218	Ugello - Nozzle 1/4"M 2510
		200/21			I50295	Ugello - Nozzle 1/4"M 25065
	4	MODULA PLUS 130/10 - 160/15 180/18			01AC381	Tubo A.P. l=15 m R1 - 5/16" M22 - M22 H.P. hose l=15 m R1 - 5/16" M22 - M22
		MODULA PLUS 200/15-200/21-160/30 XT FOOD 160/15			01AC425	Tubo A.P. l=15 m R2 - 5/16" M22 - M22 H.P. hose l=15 m R2 - 5/16" M22 - M22
5	Tutti-All				Chiave - Key	


## ACCESSORI A RICHIESTA/ ACCESSORIES ON DEMAND

AVVOLGITUBO IN ACCIAIO INOX AISI 304 - L max =30 m STAINLESS STEEL AISI 304 HOSE REEL L max = 30 m	CONTROLLO REMOTO REMOTE CONTROL	KIT UGELLO ROTANTE TURBO TURBO NOZZLE KIT
<p>Avvolgitubo alta pressione inox 30 m Stainless steel high pressure hose reel Cod. 01AC443</p>	<p>kit controllo remoto con l=15 m di cavo Remote control kit with cable l= 15 m Cod. 01AC441</p>	<p><b>Mod. Tutti-All</b> Lancia-Lance (70 cm) <b>Cod. 01AC514</b></p>
		<p><b>Mod. 160/15</b> Ugello-Nozzle (05) <b>Cod. 01AC296</b></p>
		<p><b>Mod. 130/10</b> Ugello-Nozzle (035) <b>Cod. 01AC293</b></p>
		<p><b>Mod. 180/18</b> Ugello-Nozzle (06) <b>Cod. 01AC348</b></p>
		<p><b>Mod. 200/15</b> Ugello-Nozzle (045) <b>Cod. 01AC295</b></p>
		<p><b>Mod. 200/21</b> Ugello-Nozzle (065) <b>Cod. 01AC297</b></p>
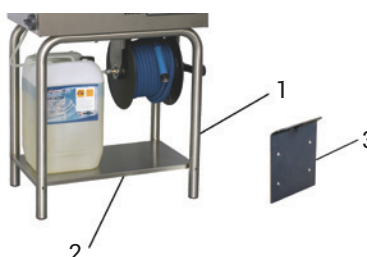
# MODULA PLUS - IDROPULTRICI STAZIONARIE PROFESSIONALI AD ACQUA FREDDA PROFESSIONAL STATIONARY COLD WATER HIGH PRESSURE CLEANERS

SUPPORTI SUPPORTS	SUPPORTO INOX STAINLESS STEEL RACK
	
<b>Mod. Tutti - All</b> supporto inox - stainless-steel support <b>Cod. 01AC446</b>	<b>Mod. Tutti - All</b> <b>Cod. 01AC510</b>
<b>Mod. Tutti - All</b> ripiano inox - stainless-steel shelf <b>Cod. B.CRDS00815</b>	
<b>Mod. Tutti - All</b> piastra aggancio rapido - bracket for quick mounting <b>Cod. B.CRDS00814</b>	
PIEDINI ANTIVIBRANTI RUBBER FEET	UNITA' RISCALDANTE HEATING UNIT
	
Piedini antivibranti per installazione a terra o su ripiano Rubber feet for shelf or floor installation <b>Cod. B.KTSP00013</b>	Vedi pag 81 - See page 81

MOD	PESI E DIMENSIONI MACCHINA WEIGHTS AND DIMENSIONS MACHINE				IMBALLO PACKAGING			
	A	B	C	Netto/Net	X	Y	H	Lordo/Gross
	[mm]	[mm]	[mm]	[kg]	[mm]	[mm]	[mm]	[kg]
MODULA PLUS 130/10	720	460	360	65	780	540	610	76
MODULA PLUS 160/15	720	460	360	69	780	540	610	80
MODULA PLUS 180/18	720	460	360	77	780	540	610	88
MODULA PLUS 200/15	720	460	360	77	780	540	610	88
MODULA PLUS 200/21	720	460	360	82	780	540	610	93
MODULA PLUS 160/30	720	460	360	95	780	540	610	105
MODULAXT FOOD 160/15	720	460	360	74	780	540	610	85

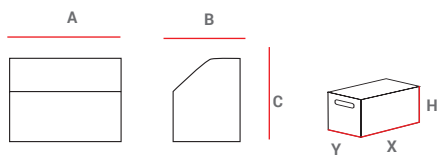

	130/10	160/15	180/18	200/15	200/21	160/30	XT FOOD 160/15
codice - code	● 01PF80	● 01PF81	● 01PF82	● 01PF83	● 01PF84	● 01PF131	● 01PF111
pressione mas. - max. pressure	[ bar ] 130	[ MPa - psi ] 160	180	200	200	160	160
portata mas. - max. flow rate	[ lt/h ] 600	900	1.080	900	1.260	1.800	900
pompa - pump	IP E2	IP 47	IP 47	IP 47	IP 47 N	IP 47	IP 47 HT
sistema di arresto - stop system	ACDS	ACDS	ACDS	ACDS	ACDS	ACDS	ACDS
rotazione pompa - pump speed	[ rpm ] 1.450	1.450	1.450	1.450	1.450	1.450	1.450
potenza assorbita max - max. absorbed power	[ Kw ] 3	5	7,2	7,2	9,3	9,9	5
alimentazione - supply voltage	[ V - ph - Hz ] 230-1-50	400-3-50	400-3-50	400-3-50	400-3-50	400-3-50	400-3-50
massima temp. aliment. - max. inlet temp.	[ °C ] 40	70	70	70	70	70	85